



| | 8 | 7 | 6 | 5 | 4 | 3 | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|------|----------------|-----------------------------------|--|---|---|---|------------------|--|----------------|---|---|--------------|---------|------|----------------|---------------------------|--|---|--|---|--|----------------------|--|---------------------|-------------|------------------|-------------|------------------|-------------|------------------|--------------|----------------|--------------------------|-------------|---|---|----|-------|-------|-------|-------|-------|-------|-----|------|----|-------------|---|---|----|-------|-------|-------|-------|-------|-------|-----|------|----|-------------|---|---|----|-------|-------|-------|-------|-------|-------|-----|------|----|-------------|---|---|----|-------|-------|-------|-------|-------|-------|-----|-----|----|-------------|---|---|----|-------|-------|-------|-------|-------|-------|-----|------|----|-------------|---|---|----|-------|-------|-------|-------|-------|-------|-----|-----|-----|-------------|---|---|----|-------|-------|-------|-------|-------|-------|-----|-----|-----|---|
| | | | | | | | | THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH MAY NOT BE DISCLOSED TO OTHERS, REPRODUCED OR USED WITHOUT AUTHORITY FROM INNOVIVE. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | <table border="1"> <tr> <td>PRODUCT</td> <td>3.5 SINGLE-SIDED INNORACK IVC RAT</td> </tr> <tr> <td>POWER SUPPLY ELECTRICAL INPUT SPECIFICATIONS</td> <td>VOLTAGE RANGE⁽¹⁾: 85-264VAC FREQUENCY RANGE: 47-63HZ AC CURRENT (TYP): 7.6A/115VAC, 3.6/230VAC</td> </tr> <tr> <td>OPERATIONAL AC CURRENT (TYP)⁽²⁾</td> <td>6-2.5A/120VAC, 3-1.25A/240VAC</td> </tr> <tr> <td>PLUG TYPE</td> <td>NEMA 5-15 PLUG/US, CEE 7/7 PLUG/EUROPE AND IEC 320 C13 LOCKING CONNECTOR</td> </tr> <tr> <td>LENGTH OF CORD</td> <td>US: 108IN [274CM] EUROPE: 78.7IN [200CM]</td> </tr> </table> | | PRODUCT | 3.5 SINGLE-SIDED INNORACK IVC RAT | POWER SUPPLY ELECTRICAL INPUT SPECIFICATIONS | VOLTAGE RANGE ⁽¹⁾ : 85-264VAC FREQUENCY RANGE: 47-63HZ AC CURRENT (TYP): 7.6A/115VAC, 3.6/230VAC | OPERATIONAL AC CURRENT (TYP) ⁽²⁾ | 6-2.5A/120VAC, 3-1.25A/240VAC | PLUG TYPE | NEMA 5-15 PLUG/US, CEE 7/7 PLUG/EUROPE AND IEC 320 C13 LOCKING CONNECTOR | LENGTH OF CORD | US: 108IN [274CM] EUROPE: 78.7IN [200CM] | <p>(1) DERATING MAY BE NEEDED UNDER LOW INPUT VOLTAGES.</p> <p>(2) VARIES DEPENDING ON RACK SIZE, ACH AND CONDITION OF BLOWER FILTER COMPONENTS.</p> <p>(3) MEASUREMENTS LISTED ARE +/-0.5".</p> <p>(4) TO ENSURE BEST RESULTS A THIMBLE OR ADJUSTABLE VALVE SHOULD BE INSTALLED AT EACH CEILING DROP - HVAC VALUES ARE BASED ON RACK RUNNING AT MAXIMUM NEGATIVE AIRFLOW SETTING.</p> <p>(5) PLEASE CONTACT INNOVIVE FOR MORE INFORMATION.</p> | | | | | D | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PRODUCT | 3.5 SINGLE-SIDED INNORACK IVC RAT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| POWER SUPPLY ELECTRICAL INPUT SPECIFICATIONS | VOLTAGE RANGE ⁽¹⁾ : 85-264VAC FREQUENCY RANGE: 47-63HZ AC CURRENT (TYP): 7.6A/115VAC, 3.6/230VAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OPERATIONAL AC CURRENT (TYP) ⁽²⁾ | 6-2.5A/120VAC, 3-1.25A/240VAC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PLUG TYPE | NEMA 5-15 PLUG/US, CEE 7/7 PLUG/EUROPE AND IEC 320 C13 LOCKING CONNECTOR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LENGTH OF CORD | US: 108IN [274CM] EUROPE: 78.7IN [200CM] | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | <table border="1"> <thead> <tr> <th rowspan="2">PRODUCT CODE</th> <th rowspan="2">COLUMNS</th> <th rowspan="2">ROWS</th> <th rowspan="2">CAGE POSITIONS</th> <th colspan="2">LENGTH (L)⁽³⁾</th> <th colspan="2">HEIGHT WITHOUT BLOWERS (H)⁽⁴⁾</th> <th colspan="2">HEIGHT WITH BLOWERS (H*)⁽⁵⁾</th> <th colspan="2">WEIGHT WITHOUT CAGES</th> <th>HVAC⁽⁶⁾</th> </tr> <tr> <th>inches (in)</th> <th>centimeters (cm)</th> <th>inches (in)</th> <th>centimeters (cm)</th> <th>inches (in)</th> <th>centimeters (cm)</th> <th>pounds (lbs)</th> <th>kilograms (kg)</th> <th>cubic feet per min (CFM)</th> </tr> </thead> <tbody> <tr> <td>RS35-3-8-24</td> <td>3</td> <td>8</td> <td>24</td> <td>49.06</td> <td>124.6</td> <td>77.50</td> <td>196.9</td> <td>92.25</td> <td>234.3</td> <td>202</td> <td>91.8</td> <td>83</td> </tr> <tr> <td>RS35-4-6-24</td> <td>4</td> <td>6</td> <td>24</td> <td>62.66</td> <td>159.1</td> <td>60.00</td> <td>152.4</td> <td>74.75</td> <td>189.9</td> <td>193</td> <td>87.7</td> <td>83</td> </tr> <tr> <td>RS35-4-7-28</td> <td>4</td> <td>7</td> <td>28</td> <td>62.66</td> <td>159.1</td> <td>68.75</td> <td>174.6</td> <td>83.50</td> <td>212.1</td> <td>211</td> <td>95.9</td> <td>88</td> </tr> <tr> <td>RS35-4-8-32</td> <td>4</td> <td>8</td> <td>32</td> <td>62.66</td> <td>159.1</td> <td>77.50</td> <td>196.9</td> <td>92.25</td> <td>234.3</td> <td>229</td> <td>104</td> <td>99</td> </tr> <tr> <td>RS35-5-6-30</td> <td>5</td> <td>6</td> <td>30</td> <td>76.25</td> <td>193.7</td> <td>60.00</td> <td>152.4</td> <td>74.75</td> <td>189.9</td> <td>214</td> <td>97.3</td> <td>94</td> </tr> <tr> <td>RS35-5-7-35</td> <td>5</td> <td>7</td> <td>35</td> <td>76.25</td> <td>193.7</td> <td>68.75</td> <td>174.6</td> <td>83.50</td> <td>212.1</td> <td>235</td> <td>107</td> <td>105</td> </tr> <tr> <td>RS35-5-8-40</td> <td>5</td> <td>8</td> <td>40</td> <td>76.25</td> <td>193.7</td> <td>77.50</td> <td>196.9</td> <td>92.25</td> <td>234.3</td> <td>256</td> <td>116</td> <td>116</td> </tr> </tbody> </table> | | | | | | | | | | | | | PRODUCT CODE | COLUMNS | ROWS | CAGE POSITIONS | LENGTH (L) ⁽³⁾ | | HEIGHT WITHOUT BLOWERS (H) ⁽⁴⁾ | | HEIGHT WITH BLOWERS (H*) ⁽⁵⁾ | | WEIGHT WITHOUT CAGES | | HVAC ⁽⁶⁾ | inches (in) | centimeters (cm) | inches (in) | centimeters (cm) | inches (in) | centimeters (cm) | pounds (lbs) | kilograms (kg) | cubic feet per min (CFM) | RS35-3-8-24 | 3 | 8 | 24 | 49.06 | 124.6 | 77.50 | 196.9 | 92.25 | 234.3 | 202 | 91.8 | 83 | RS35-4-6-24 | 4 | 6 | 24 | 62.66 | 159.1 | 60.00 | 152.4 | 74.75 | 189.9 | 193 | 87.7 | 83 | RS35-4-7-28 | 4 | 7 | 28 | 62.66 | 159.1 | 68.75 | 174.6 | 83.50 | 212.1 | 211 | 95.9 | 88 | RS35-4-8-32 | 4 | 8 | 32 | 62.66 | 159.1 | 77.50 | 196.9 | 92.25 | 234.3 | 229 | 104 | 99 | RS35-5-6-30 | 5 | 6 | 30 | 76.25 | 193.7 | 60.00 | 152.4 | 74.75 | 189.9 | 214 | 97.3 | 94 | RS35-5-7-35 | 5 | 7 | 35 | 76.25 | 193.7 | 68.75 | 174.6 | 83.50 | 212.1 | 235 | 107 | 105 | RS35-5-8-40 | 5 | 8 | 40 | 76.25 | 193.7 | 77.50 | 196.9 | 92.25 | 234.3 | 256 | 116 | 116 | C |
| PRODUCT CODE | COLUMNS | ROWS | CAGE POSITIONS | LENGTH (L) ⁽³⁾ | | HEIGHT WITHOUT BLOWERS (H) ⁽⁴⁾ | | HEIGHT WITH BLOWERS (H*) ⁽⁵⁾ | | WEIGHT WITHOUT CAGES | | HVAC ⁽⁶⁾ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | inches (in) | centimeters (cm) | inches (in) | centimeters (cm) | inches (in) | centimeters (cm) | pounds (lbs) | kilograms (kg) | cubic feet per min (CFM) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS35-3-8-24 | 3 | 8 | 24 | 49.06 | 124.6 | 77.50 | 196.9 | 92.25 | 234.3 | 202 | 91.8 | 83 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS35-4-6-24 | 4 | 6 | 24 | 62.66 | 159.1 | 60.00 | 152.4 | 74.75 | 189.9 | 193 | 87.7 | 83 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS35-4-7-28 | 4 | 7 | 28 | 62.66 | 159.1 | 68.75 | 174.6 | 83.50 | 212.1 | 211 | 95.9 | 88 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS35-4-8-32 | 4 | 8 | 32 | 62.66 | 159.1 | 77.50 | 196.9 | 92.25 | 234.3 | 229 | 104 | 99 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS35-5-6-30 | 5 | 6 | 30 | 76.25 | 193.7 | 60.00 | 152.4 | 74.75 | 189.9 | 214 | 97.3 | 94 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS35-5-7-35 | 5 | 7 | 35 | 76.25 | 193.7 | 68.75 | 174.6 | 83.50 | 212.1 | 235 | 107 | 105 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RS35-5-8-40 | 5 | 8 | 40 | 76.25 | 193.7 | 77.50 | 196.9 | 92.25 | 234.3 | 256 | 116 | 116 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | | | | | | | | | | | | | | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | | | | | | | | | | | | | | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Innovive
V3.5 SINGLE SIDED RAT

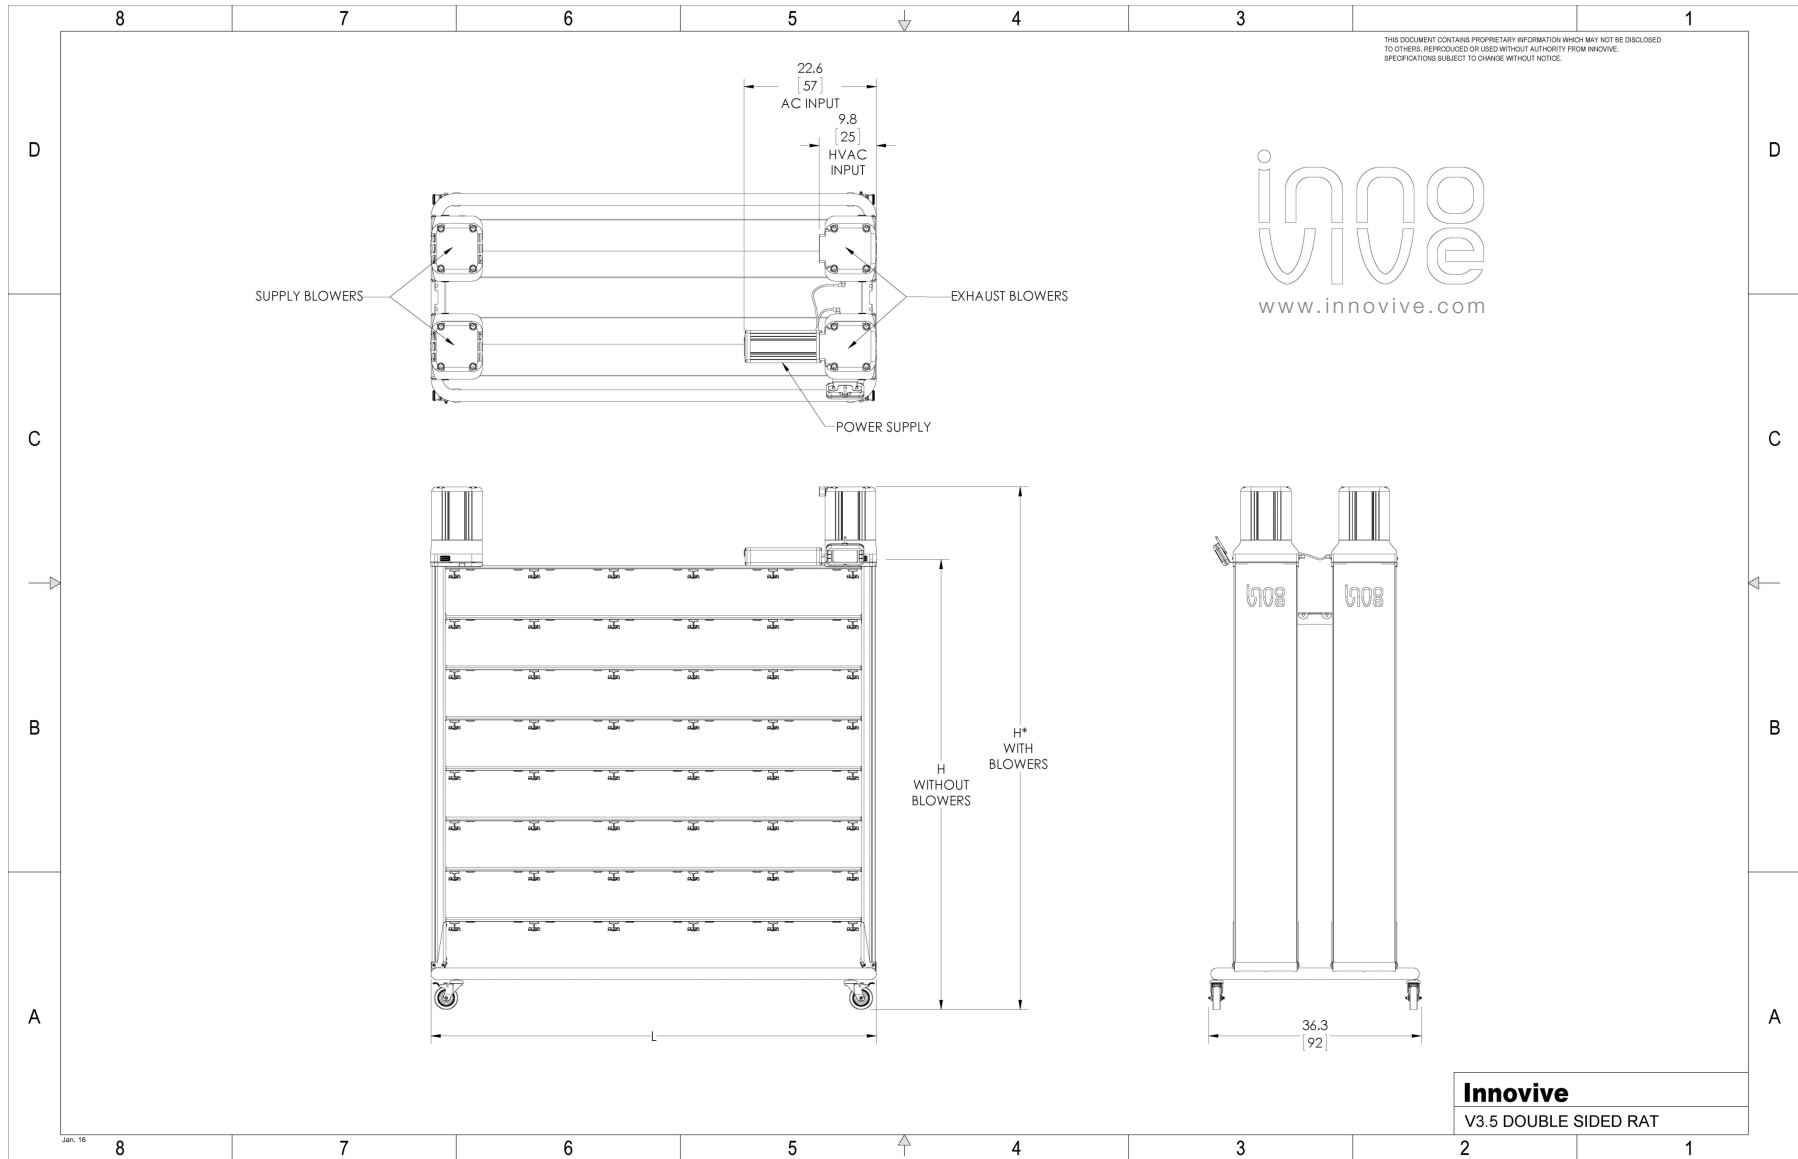

Innovive
V3.5 DOUBLE SIDED RAT

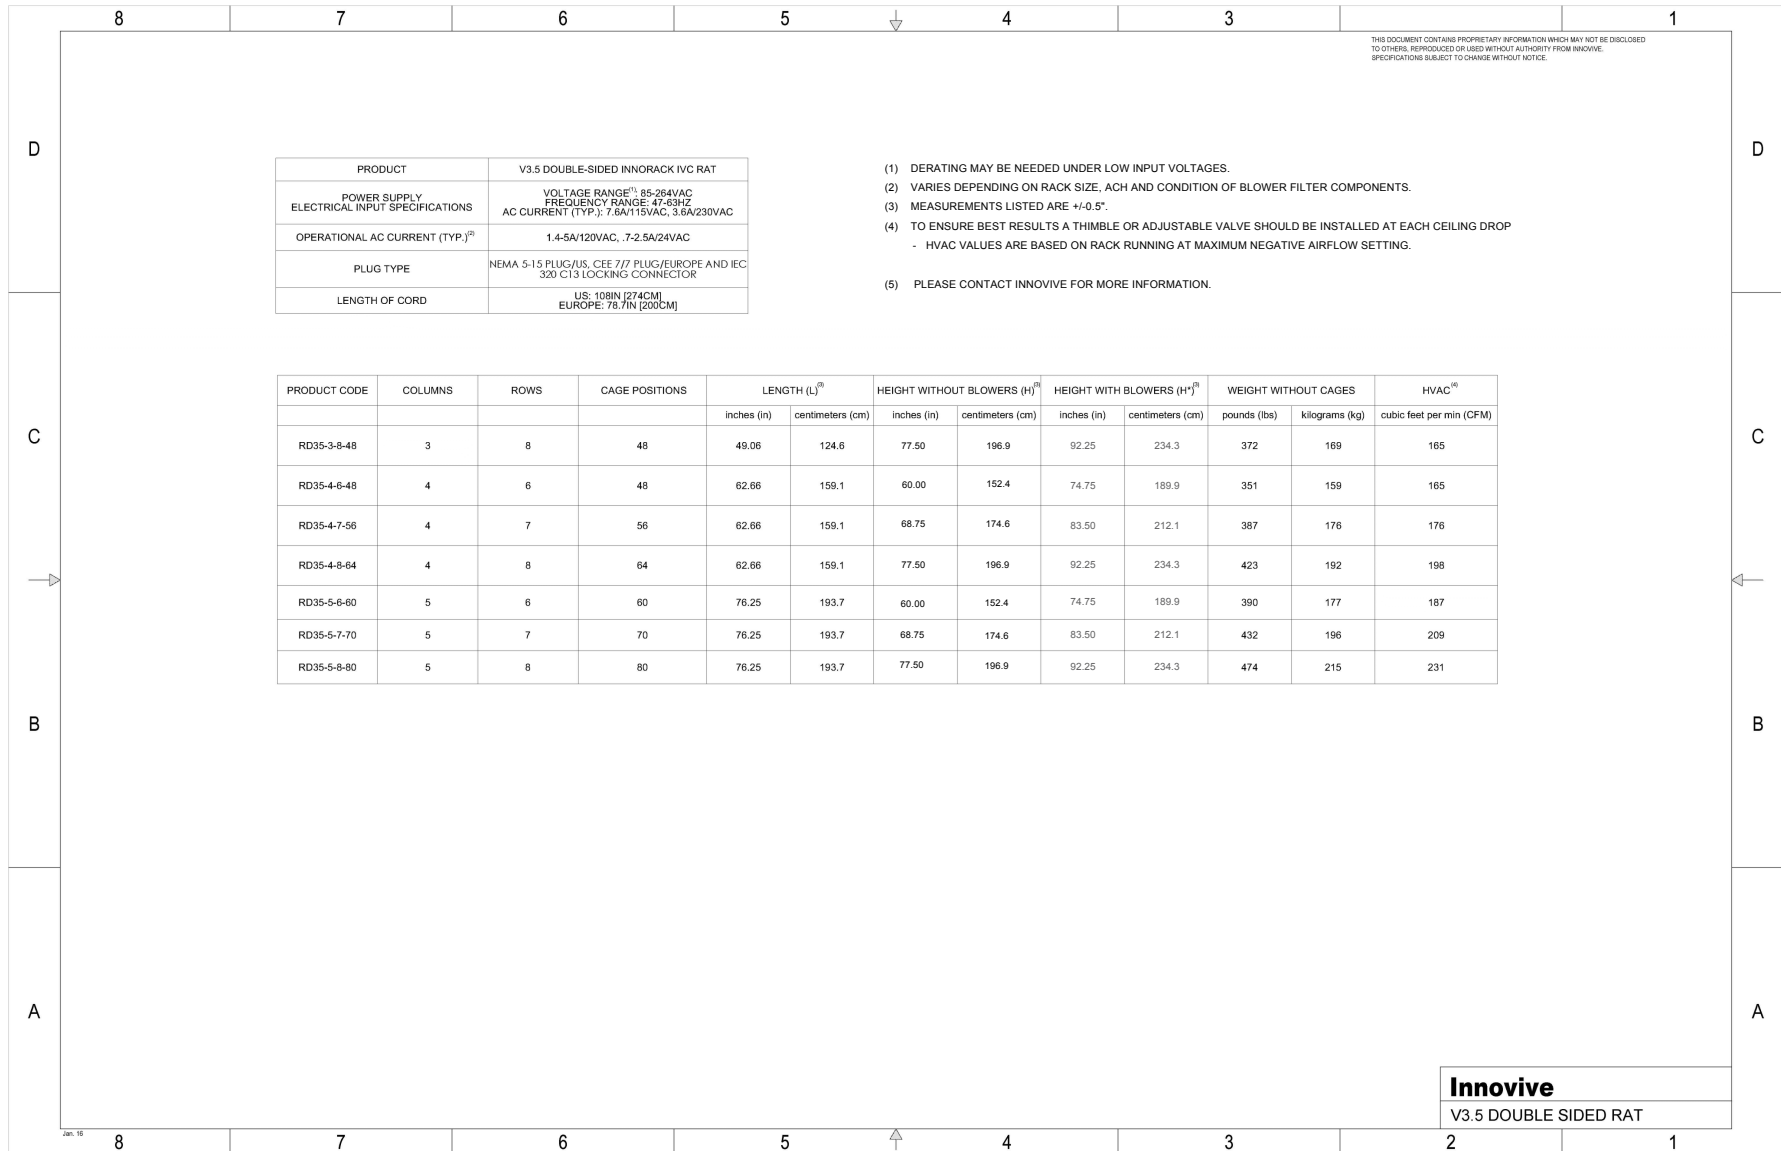

| | |
|--|---|
| PRODUCT | V3.5 DOUBLE-SIDED INNORACK IVC RAT |
| POWER SUPPLY ELECTRICAL INPUT SPECIFICATIONS | VOLTAGE RANGE ⁽¹⁾ : 85-264VAC FREQUENCY RANGE: 47-63HZ AC CURRENT (TYP.): 7.6A/115VAC, 3.6A/230VAC |
| OPERATIONAL AC CURRENT (TYP.) ⁽²⁾ | 1.4-5A/120VAC, .7-2.5A/24VAC |
| PLUG TYPE | NEMA 5-15 PLUG/US, CEE 7/7 PLUG/EUROPE AND IEC 320 C13 LOCKING CONNECTOR |
| LENGTH OF CORD | US: 108IN [274CM] EUROPE: 78.7IN [200CM] |

- (1) DERATING MAY BE NEEDED UNDER LOW INPUT VOLTAGES.
- (2) VARIES DEPENDING ON RACK SIZE, ACH AND CONDITION OF BLOWER FILTER COMPONENTS.
- (3) MEASUREMENTS LISTED ARE +/-0.5".
- (4) TO ENSURE BEST RESULTS A THIMBLE OR ADJUSTABLE VALVE SHOULD BE INSTALLED AT EACH CEILING DROP
- HVAC VALUES ARE BASED ON RACK RUNNING AT MAXIMUM NEGATIVE AIRFLOW SETTING.
- (5) PLEASE CONTACT INNOVIVE FOR MORE INFORMATION.

| PRODUCT CODE | COLUMNS | ROWS | CAGE POSITIONS | LENGTH (L) ⁽³⁾ | | HEIGHT WITHOUT BLOWERS (H) ⁽⁴⁾ | | HEIGHT WITH BLOWERS (H) ⁽⁵⁾ | | WEIGHT WITHOUT CAGES | | HVAC ⁽⁶⁾ cubic feet per min (CFM) |
|--------------|---------|------|----------------|---------------------------|------------------|---|------------------|--|------------------|----------------------|----------------|---|
| | | | | inches (in) | centimeters (cm) | inches (in) | centimeters (cm) | inches (in) | centimeters (cm) | pounds (lbs) | kilograms (kg) | |
| RD35-3-8-48 | 3 | 8 | 48 | 49.06 | 124.6 | 77.50 | 196.9 | 92.25 | 234.3 | 372 | 169 | 165 |
| RD35-4-6-48 | 4 | 6 | 48 | 62.66 | 159.1 | 60.00 | 152.4 | 74.75 | 189.9 | 351 | 159 | 165 |
| RD35-4-7-56 | 4 | 7 | 56 | 62.66 | 159.1 | 68.75 | 174.6 | 83.50 | 212.1 | 387 | 176 | 176 |
| RD35-4-8-64 | 4 | 8 | 64 | 62.66 | 159.1 | 77.50 | 196.9 | 92.25 | 234.3 | 423 | 192 | 198 |
| RD35-5-6-80 | 5 | 6 | 60 | 76.25 | 193.7 | 60.00 | 152.4 | 74.75 | 189.9 | 390 | 177 | 187 |
| RD35-5-7-70 | 5 | 7 | 70 | 76.25 | 193.7 | 68.75 | 174.6 | 83.50 | 212.1 | 432 | 196 | 209 |
| RD35-5-8-80 | 5 | 8 | 80 | 76.25 | 193.7 | 77.50 | 196.9 | 92.25 | 234.3 | 474 | 215 | 231 |

Innovive
V3.5 DOUBLE SIDED RAT